

SEA&LAND ELECTRONIC CORP.

13F.,No.120-10,
 Sec.3,Zhongshan Rd.,Zhonghe City,Taipei County,
 Taiwan, R.O.C.
 Tel.: 886-2-8221-2567
 Fax.: 886-2-2225-7268

Techfuse
PTC Devices
Resettable Fuse

PRODUCT: SMD0805-010
 DOCUMENT: QR0429
 ECN. NO.:
 REV LETTER: A
 REV DATE: 2011-3-10
 PAGE NO.: 1 of 1

Specification Sheet

Terminal Pad Solderability:
 Meets EIA Specification RS186-9E
 And ANSI/J-STD-002 Category 3.

Terminal Pad Materials:
 Tin-plated Nickel-Copper

Lead-Free, RoHS Compliant

Marking:

Part Identification
 1 = 010

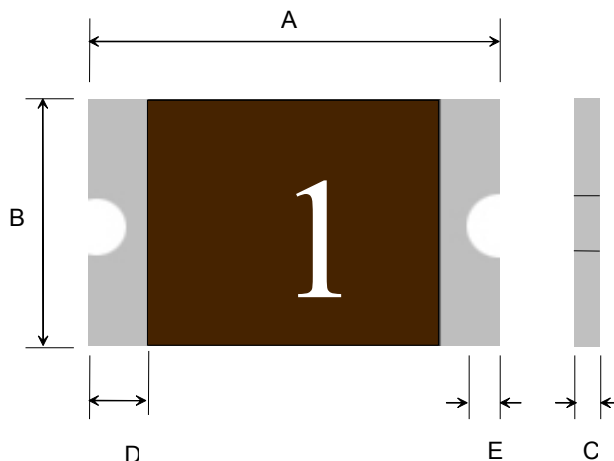


TABLE I. DIMENSIONS:

Model	Marking	A		B		C		D	E
		Min.	Max.	Min.	Max.	Min.	Max.	Min.	Min.
SMD0805-010	1	2.00	2.20	1.20	1.50	0.50	1.00	0.20	0.10

Unit:mm

TABLE II. PERFORMANCE RATING:

Model	Marking	V _{max} (Vdc)	I _{max} (A)	I _{hold} @25°C (A)	I _{trip} @25°C (A)	P _d Typ. (W)	Maximum Time To Trip		Resistance		
							Current (A)	Time (Sec)	R _{i_min} (Ω)	R _{i_typ} (Ω)	R _{1_max} (Ω)
SMD0805-010	1	15.0	100	0.10	0.30	0.50	0.5	1.50	1.000	2.500	6.000

Order Information

Packaging

SMD0805	010	Tape & Reel Quantity	
Product name	Hold	Max	5,000 pcs/reel
Size 2012 mm / 0805 mils	Current	voltage	
SMD: surface mount device	0.10A		

Recognition: UL Pending.