

**SEA&LAND ELECTRONIC CORP.**

13F.,No.120-10,  
 Sec.3,Zhongshan Rd.,Zhonghe City,Taipei County,  
 Taiwan, R.O.C.  
 Tel.: 886-2-8221-2567  
 Fax.: 886-2-2225-7268

**Techfuse**  
**PTC Devices**  
 Resettable Fuse

PRODUCT: mSMD110-16V  
 DOCUMENT: QR0429  
 ECN. NO.:  
 REV LETTER:  
 REV DATE: 2011-3-10  
 PAGE NO.: 1 of 1

# Specification Sheet


Terminal Pad Solderability:  
 Meets EIA Specification RS186-9E  
 And ANSI/J-STD-002 Category 3.

Terminal Pad Materials:  
 Tin-plated Nickel-Copper

Lead-Free, RoHS Compliant

Marking:

α Alpha Logo  
 110 Part Identification

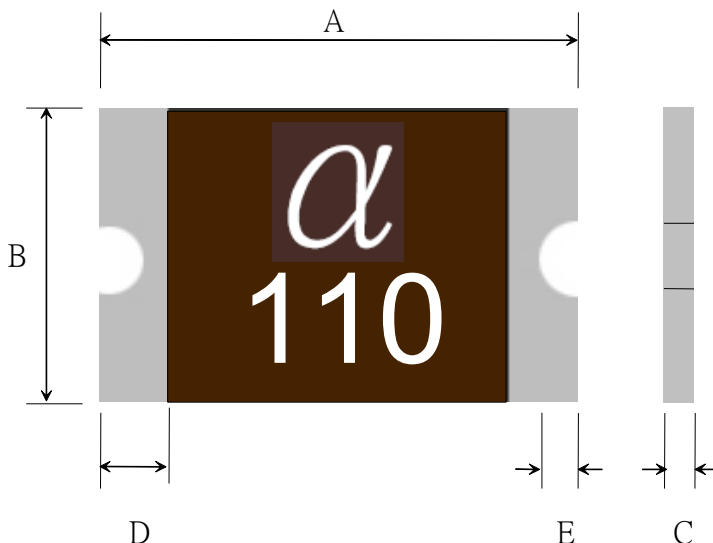

**TABLE I. DIMENSIONS:**

Model	A		B		C		D	E
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Min.
mSMD110-16V	4.37	4.73	3.07	3.41	0.40	0.90	0.30	0.25

Unit:mm

**TABLE II. PERFORMANCE RATINGS:**

Model	V <sub>max</sub> (V)	I <sub>max</sub> (A)	I <sub>hold</sub> @25°C (A)	I <sub>trip</sub> @25°C (A)	P <sub>d</sub> Typ. (W)	Maximum Time To Trip		Resistance		
						Current (A)	Time (Sec)	R <sub>i min</sub> (Ω)	R <sub>i typ</sub> (Ω)	R <sub>1 max</sub> (Ω)
mSMD110-16V	16.0	100	1.10	2.20	0.8	8.0	0.30	0.050	0.065	0.250

**Order Information**

**Packaging**

mSMD1812	110	-16	Tape & Reel Quantity
Product name	Hold	Max	110 1500 pcs/reel
Size 4532 mm /1812 mils	Current	voltage	
SMD: surface mount device	1.10A		

Recognition: UL Pending.