

SEA&LAND ELECTRONIC CORP.

13F.,No.120-10,
 Sec.3,Zhongshan Rd.,Zhonghe City,Taipei County,
 Taiwan, R.O.C.
 Tel.: 886-2-8221-2567
 Fax.: 886-2-2225-7268

Techfuse
PTC Devices
 Resettable Fuse

PRODUCT: nSMD020-16V
 DOCUMENT: QR0429
 ECN. NO.:
 REV LETTER:
 REV DATE: 2011-3-10
 PAGE NO.: 1 of 1

Specification Sheet

Terminal Pad Solderability:
 Meets EIA Specification RS186-9E
 And ANSI/J-STD-002 Category 3.

Terminal Pad Materials:
 Tin-plated Nickel-Copper

Lead-Free, RoHS Compliant

Marking:

Part Identification

nSMD020 = α A

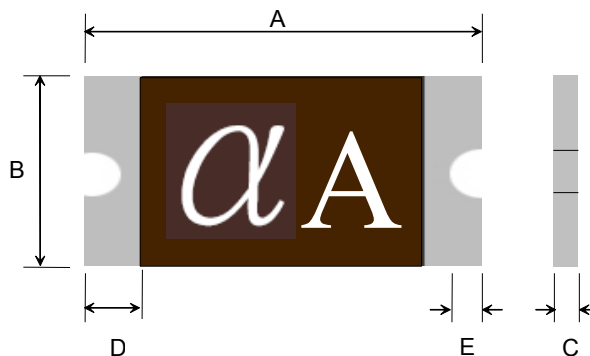


TABLE I. DIMENSIONS:

Model	Marking	A		B		C		D	E	Unit:mm
		Min.	Max.	Min.	Max.	Min.	Max.	Min.	Min.	
nSMD020-16V	αA	3.00	3.50	1.50	1.80	0.40	0.90	0.15	0.10	

TABLE II. PERFORMANCE RATINGS:

Model	Marking	V _{max} (Vdc)	I _{max} (A)	I _{hold} @25°C (A)	I _{trip} @25°C (A)	P _d Typ. (W)	Maximum Time To Trip		Resistance	
							Current (A)	Time (Sec)	R _{i_min} (Ω)	R _{1_max} (Ω)
nSMD020-16V	αA	16.0	100	0.20	0.46	0.6	1.0	0.60	0.600	2.600

Order Information

Packaging

SMD1206	020	-16V	Tape & Reel Quantity
Product name	Hold	Max	5000 pcs/reel
Size 3216 mm / 1206 mils	Current	voltage	
SMD: surface mount device	0.20A		

Recognition: UL Pending.