

## Specification Sheet

Terminal Pad Solderability:  
 Meets EIA Specification RS186-9E  
 And ANSI/J-STD-002 Category 3.

Terminal Pad Materials:  
 Tin-plated Nickel-Copper

Lead-Free, RoHS Compliant

Marking:

$\alpha$  Alpha Logo  
 030 Part Identification

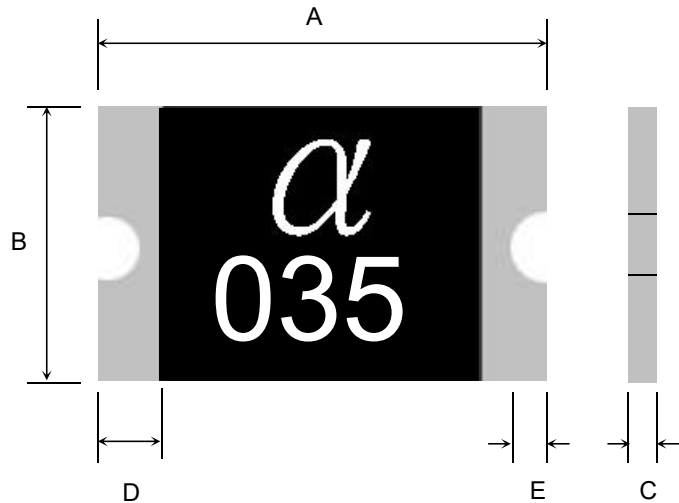


TABLE I. DIMENSIONS:

Model	A		B		C		D	E
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Min.
mSMD035	4.37	4.73	3.07	3.41	0.50	1.00	0.30	0.25

Unit:mm

TABLE II. PERFORMANCE RATINGS:

Model	$V_{max}$ (V)	$I_{max}$ (A)	$I_{hold}$ @25°C (A)	$I_{trip}$ @25°C (A)	$P_d$ Typ. (W)	Maximum Time To Trip		Resistance	
						Current (A)	Time (Sec)	$R_{i_{min}}$ (Ω)	$R_{1_{max}}$ (Ω)
mSMD035	30	100	0.35	0.70	0.8	8.0	0.10	0.230	2.800

mSMD	035	Tape & Reel Quantity
Product name	Hold Max	1500 pcs/reel
Size 4532 mm / 1812 mils	Current voltage	
SMD: surface mount device	0.30A	

Recognition:

Agency Approvals :  E201504/E319079



CQC25001473187  
 GB 4943.1-2022;IEC 60730-1 : 2013 15、17、J.15、J.17;GB/T 7153-2002

Regulation/Standard: 2015/863/EU



EN14582

