

SEA&LAND ELECTRONIC CORP.

13F., No.120-10,
Sec. 3, Zhongshan Rd., Zhonghe Dist., New Taipei City 235,
Taiwan
Tel.: 886-2-8221-2567
Fax.: 886-2-2225-7268

Techfuse
PTC Devices
Resettable Fuse

PRODUCT: mSMD110-16V
DOCUMENT: QR0429
ECN. NO.:
REV LETTER:
REV DATE: 2021-4-30
PAGE NO.: 1 of 1

Specification Sheet

Terminal Pad Solderability:
Meets EIA Specification RS186-9E
And ANSI/J-STD-002 Category 3.

Terminal Pad Materials:
Tin-plated Nickel-Copper

Lead-Free, RoHS Compliant

Marking:

α Alpha Logo
110 Part Identification

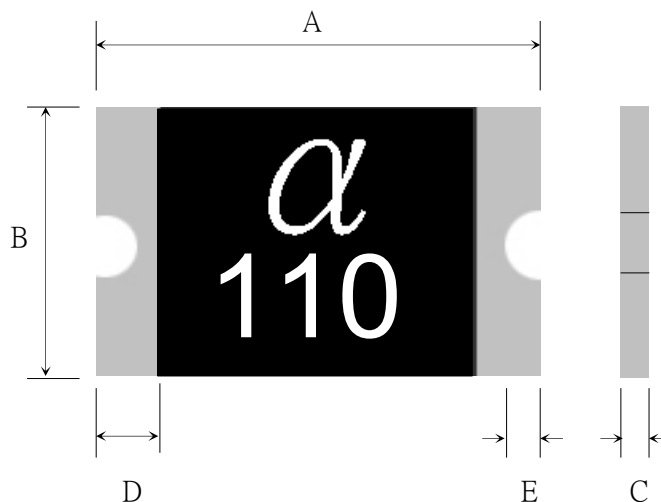


TABLE I. DIMENSIONS:

Model	A		B		C		D	E
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Min.
mSMD110-16V	4.37	4.73	3.07	3.41	0.60	1.30	0.30	0.25

Unit:mm

TABLE II. PERFORMANCE RATINGS:

Model	V_{max} (V)	I_{max} (A)	I_{hold} @25°C (A)	I_{trip} @25°C (A)	P_d Typ. (W)	Maximum Time To Trip		Resistance		
						Current (A)	Time (Sec)	$R_{i_{min}}$ (Ω)	$R_{i_{typ}}$ (Ω)	$R_{1_{max}}$ (Ω)
mSMD110-16V	16.0	100	1.10	2.20	0.8	8.0	0.30	0.050	0.050	0.250

Order Information

Packaging

mSMD1812		110-16v		Tape & Reel Quantity	
Product name		Hold	Max	1500 pcs/reel	
Size 4532 mm /1812 mils		Current	voltage		
SMD: surface mount device		1.10A			

Recognition:

UL/TUV, approved.

E201504/E319079

R 50481056

2015/863/EU

EN14582

