

**SEA&LAND ELECTRONIC CORP.**

13F., No.120-10,  
 Sec. 3, Zhongshan Rd., Zhonghe Dist., New Taipei City 235,  
 Taiwan  
 Tel.: 886-2-8221-2567  
 Fax.: 886-2-2225-7268

**Techfuse**  
**PTC Devices**  
 Resettable Fuse

PRODUCT: mSMD260-13.2V  
 DOCUMENT: QR0429  
 ECN. NO.:  
 REV LETTER:  
 REV DATE: 2023-1-5  
 PAGE NO.: 1 of 1

# Specification Sheet


Terminal Pad Solderability:  
 Meets EIA Specification RS186-9E  
 And ANSI/J-STD-002 Category 3.

Terminal Pad Materials:  
 Tin-plated Nickel-Copper

Lead-Free, RoHS Compliant

Marking:

$\alpha$  Alpha Logo  
 260 Part Identification

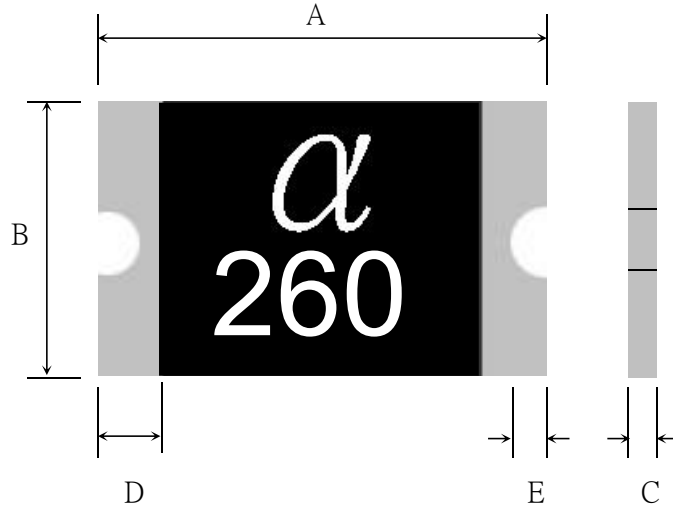

**TABLE I. DIMENSIONS:**

Model	A		B		C		D	E
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Min.
mSMD260-13.2V	4.37	4.73	3.07	3.41	0.60	1.30	0.30	0.25

Unit:mm

**TABLE II. PERFORMANCE RATINGS:**

Model	$V_{max}$ (V)	$I_{max}$ (A)	$I_{hold}$ @25°C (A)	$I_{trip}$ @25°C (A)	$P_d$ Typ. (W)	Maximum Time To Trip		Resistance	
						Current (A)	Time (Sec)	$R_{i_{min}}$ (Ω)	$R_{1_{max}}$ (Ω)
mSMD260-13.2V	13.2	100	2.60	5.00	0.8	8.0	2.50	0.015	0.080

## Order Information

## Packaging

mSMD1812	260-13.2V	Tape & Reel Quantity
Product name	Hold	1500 pcs/reel
Size 4532 mm /1812 mils	Current	
SMD: surface mount device	2.60A	

Recognition: UL/TUV, approved.

E201504/E319079  
 R 50481056  
 2015/863/EU  
 EN14582

