

SEA&LAND ELECTRONIC CORP.

13F.,No.120-10,
Sec.3,Zhongshan Rd.,Zhonghe City,Taipei County,
Taiwan, R.O.C.

Tel.: 886-2-8221-2567

Fax.: 886-2-2225-7268

Techfuse
PTC Devices
Resettable Fuse

PRODUCT: C250-1500

DOCUMENT: QR0429

ECN. NO.:

REV LETTER:

REV DATE: 2020/8/24

PAGE NO.: 1 of 1

Specification Sheet

Max Interrupt Voltage: 250 Vac
Max Operating Voltage: 60 Vdc
Maximum Interrupt Current: 10 A

Insulating Material:
meets UL94 V-0 Requirements
Lead-free, meets RoHS

Lead Material:
Tin plated copper, 0.8 Dia.

Marking:

└── Sea&Land Logo
└──

C250 - Vmax 250V
1500 - hold current
XXX - Date code

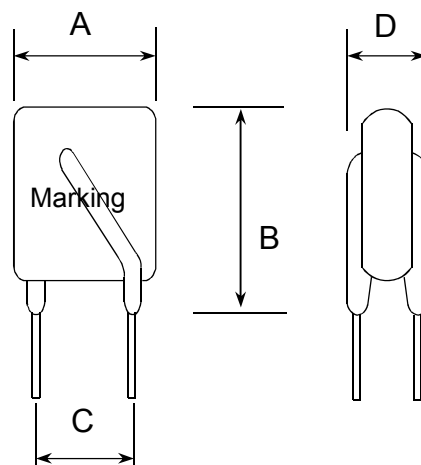


TABLE I. DIMENSIONS:

	A	B	C	D
	MAX	MAX	TYP	MAX
mm	18.0	25.0	10.2	4.6

TABLE II. PERFORMANCE RATINGS:

Model	V _{max} (Vac)	I _{max} (A)	I _{hold} @25°C (A)	Maximum Time To Trip		Resistance	
				Current (A)	Time (Sec)	Ri min (Ω)	Ri max (Ω)
C250-1500	250	10	1.50	4.50	50.0	0.20	0.50

Order Information

Packing

C250	1500	Model	Bag Q'ty
Product name	Hold Current	C250-1500	200
250V	mA		

Recognition: UL/ TÜV, pending.