

SEA&LAND ELECTRONIC CORP.

13F.,No.120-10,
 Sec.3,Zhongshan Rd.,Zhonghe City,Taipei County,
 Taiwan, R.O.C.
 Tel.: 886-2-8221-2567
 Fax.: 886-2-2225-7268

Techfuse
PTC Devices
 Resettable Fuse

PRODUCT: nSMD035
 DOCUMENT: QR0429
 ECN. NO.:
 REV LETTER:
 REV DATE: 2011-3-10
 PAGE NO.: 1 of 1

Specification Sheet

Terminal Pad Solderability:
 Meets EIA Specification RS186-9E
 And ANSI/J-STD-002 Category 3.

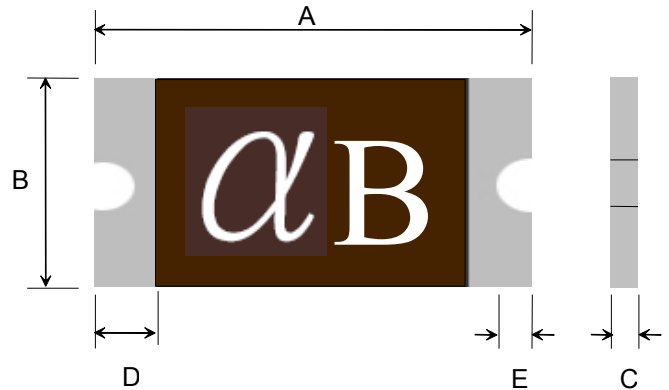
Terminal Pad Materials:
 Tin-plated Nickel-Copper

Lead-Free, RoHS Compliant

Marking:

Part Identification

nSMD035 = αB

**TABLE I. DIMENSIONS**

Model	Marking	A		B		C		D	E
		Min.	Max.	Min.	Max.	Min.	Max.	Min.	Min.
nSMD035	αB	3.00	3.50	1.50	1.80	0.40	0.90	0.15	0.10

Unit:mm

TABLE II. PERFORMANCE RATINGS:

Model	Marking	V _{max} (Vdc)	I _{max} (A)	I _{hold} @25°C (A)	I _{trip} @25°C (A)	P _d Typ. (W)	Maximum Time To Trip		Resistance		
							Current (A)	Time (Sec)	R _{i min} (Ω)	R _{i typ} (Ω)	R _{1 max} (Ω)
nSMD035	αB	6.0	100	0.35	0.75	0.6	8.0	0.10	0.250	0.380	1.300

Order Information**Packaging**

SMD1206	035	Tape & Reel Quantity	
Product name	Hold	Max	5000 pcs/reel
Size 3216 mm / 1206 mils	Current	voltage	
SMD: surface mount device	0.35A		

Recognition: UL Approved.

E201504/E319079

