

SEA&LAND ELECTRONIC CORP.

13F., No.120-10,
Sec. 3, Zhongshan Rd., Zhonghe Dist., New Taipei City 235,
Taiwan
Tel.: 886-2-8221-2567
Fax.: 886-2-2225-7268

Techfuse
PTC Devices
Resettable Fuse

PRODUCT: nSMD075-13.2V
DOCUMENT: QR0429
ECN. NO.:
REV LETTER:
REV DATE: 2023-1-3
PAGE NO.: 1 of 1

Specification Sheet

Terminal Pad Solderability:
Meets EIA Specification RS186-9E
And ANSI/J-STD-002 Category 3.

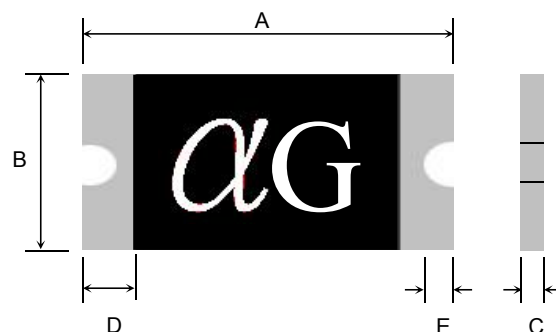
Terminal Pad Materials:
Tin-plated Nickel-Copper

Lead-Free, RoHS Compliant

Marking:

Part Identification

nSMD075 = αG

**TABLE I. DIMENSIONS:**

Model	Marking	A		B		C		D	E
		Min.	Max.	Min.	Max.	Min.	Max.	Min.	Min.
nSMD075-13.2V	αG	3.00	3.50	1.50	1.80	0.50	1.20	0.15	0.10

 Unit:mm**TABLE II. PERFORMANCE RATINGS:**

Model	Marking	V_{max} (Vdc)	I_{max} (A)	I_{hold} @25°C (A)	I_{trip} @25°C (A)	P_d Typ. (W)	Maximum Time To Trip		Resistance	
							Current (A)	Time (Sec)	$R_{i_{min}}$ (Ω)	$R_{1_{max}}$ (Ω)
nSMD075-13.2V	αG	13.2	100	0.75	1.50	0.6	8.0	0.20	0.090	0.500

Order Information**Packaging**

SMD1206	075-13.2V	Tape & Reel Quantity
Product name	Hold	Max
Size 3216 mm / 1206 mils	Current	voltage
SMD: surface mount device	0.75A	5000 pcs/reel

Recognition: UL approved. E201504/E319079

2015/863/EU

EN14582

