

## Specification Sheet


Terminal Pad Solderability:  
 Meets EIA Specification RS186-9E  
 And ANSI/J-STD-002 Category 3.

Terminal Pad Materials:  
 Tin-plated Nickel-Copper

Lead-Free, RoHS Compliant

Marking:

Part Identification  
 5 = 050

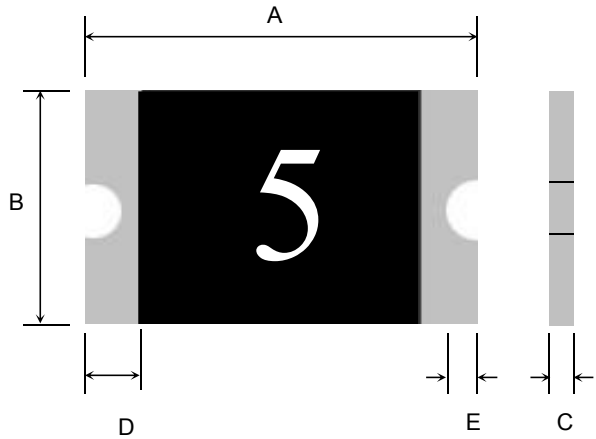

**TABLE I. DIMENSIONS:**

Model	Marking	A		B		C		D	E
		Min.	Max.	Min.	Max.	Min.	Max.	Min.	Min.
SMD0805-050-16V	5	1.90	2.20	1.20	1.50	0.50	1.10	0.20	0.10

Unit:mm

**TABLE II. PERFORMANCE RATINGS:**

Model	Marking	$V_{max}$ (Vdc)	$I_{max}$ (A)	$I_{hold}$ @25°C (A)	$I_{trip}$ @25°C (A)	$P_d$ Typ. (W)	Maximum Time To Trip		Resistance	
							Current (A)	Time (Sec)	$R_{i_{min}}$ (Ω)	$R_{1_{max}}$ (Ω)
SMD0805-050-16V	5	16.0	100	0.50	1.00	0.5	8.0	0.10	0.150	0.850

### Order Information

### Packaging

SMD0805	050-16V	Tape & Reel Quantity
Product name	Hold Max	5,000 pcs/reel
Size 2012 mm / 0805 mils	Current voltage	
SMD: surface mount device	0.50A	

Recognition: UL approved. E201504/E319079



2015/863/EU



EN14582

