

Specification Sheet

Terminal Pad Solderability:
Meets EIA Specification RS186-9E
And ANSI/J-STD-002 Category 3.

Terminal Pad Materials:
Tin-plated Nickel-Copper

Lead-Free, RoHS Compliant

Marking:
Part Identification
nSMD100 = αH

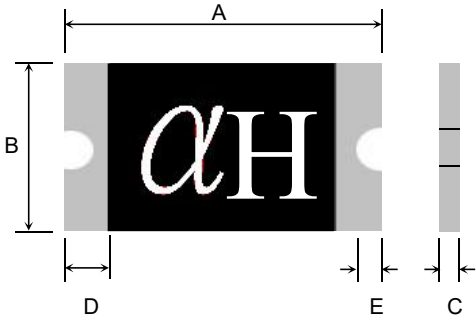


TABLE I. DIMENSIONS:

Model	Marking	A		B		C		D	E
		Min.	Max.	Min.	Max.	Min.	Max.	Min.	Min.
nSMD100-13.2V	αH	3.00	3.50	1.50	1.80	0.50	1.20	0.15	0.10

Unit:mm

TABLE II. PERFORMANCE RATINGS:

Model	Marking	V _{max} (Vdc)	I _{max} (A)	I _{hold} @25°C (A)	I _{trip} @25°C (A)	P _d Typ. (W)	Maximum Time To Trip		Resistance	
							Current (A)	Time (Sec)	R _{i min} (Ω)	R _{1 max} (Ω)
nSMD100-13.2V	αH	13.2	100	1.00	1.80	0.6	8.0	0.30	0.055	0.270

Order Information

Packaging

SMD1206		100-13.2V		Tape & Reel Quantity	
Product name		Hold	Max	3500 pcs/reel	
Size 3216 mm / 1206 mils		Current	voltage		
SMD: surface mount device		1.00A	13.2		

Agency Approvals :



E201504(Alpha-Top)/E319079(Sea&Land)



J 50656626



CQC25001473187
GB 4943.1-2022;IEC 60730-1 : 2013 15、17、J.15、J.17;GB/T 7153-2002

Regulation/Standard:



2015/863/EU



EN14582