

SEA&LAND ELECTRONIC CORP.

13F.,No.120-10,
 Sec.3,Zhongshan Rd.,Zhonghe City,Taipei County,
 Taiwan, R.O.C.
 Tel.: 886-2-8221-2567
 Fax.: 886-2-2225-7268

Techfuse
PTC Devices
 Resettable Fuse

PRODUCT: mSMD150
 DOCUMENT: QR0429
 ECN. NO.:
 REV LETTER:
 REV DATE: 2011-3-10
 PAGE NO.: 1 of 1

Specification Sheet

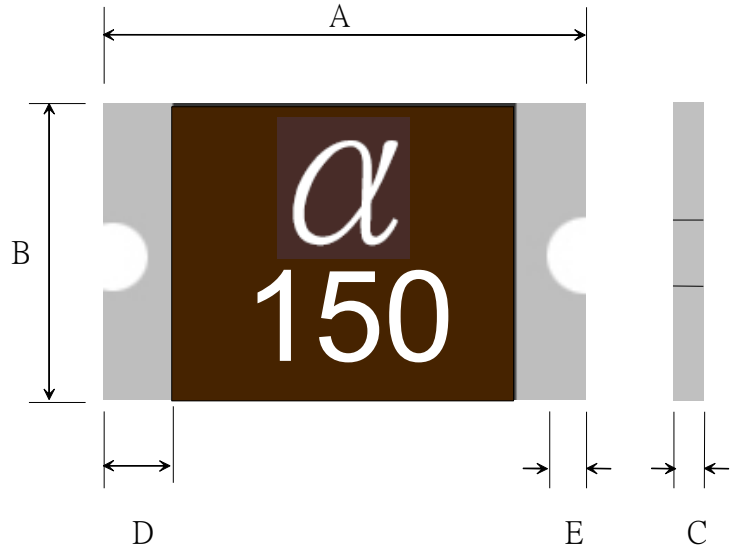
Terminal Pad Solderability:
 Meets EIA Specification RS186-9E
 And ANSI/J-STD-002 Category 3.

Terminal Pad Materials:
 Tin-plated Nickel-Copper

Lead-Free, RoHS Compliant

Marking:

α Alpha Logo
 150 Part Identification

**TABLE I. DIMENSIONS:**

Model	A		B		C		D	E
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Min.
mSMD150	4.37	4.73	3.07	3.41	0.30	0.80	0.30	0.25

Unit:mm

TABLE II. PERFORMANCE RATINGS:

Model	V_{max} (V)	I_{max} (A)	I_{hold} @25°C (A)	I_{trip} @25°C (A)	P_d Typ. (W)	Maximum Time To Trip		Resistance		
						Current (A)	Time (Sec)	$R_{i_{min}}$ (Ω)	$R_{i_{typ}}$ (Ω)	$R_{1_{max}}$ (Ω)
mSMD150	8.0	100	1.50	3.00	0.8	8.0	0.50	0.040	0.055	0.160

Order Information**Packaging**

mSMD1812	150	Tape & Reel Quantity	
Product name	Hold	Max	
Size 4532 mm /1812 mils	Current	voltage	150 1500 pcs/reel
SMD: surface mount device	1.50A		

Recognition: UL Approved.

E201504/E319079

