

SEA&LAND ELECTRONIC CORP.

13F., No.120-10,
Sec. 3, Zhongshan Rd., Zhonghe Dist., New Taipei City 235,
Taiwan
Tel.: 886-2-8221-2567
Fax.: 886-2-2225-7268

Techfuse
PTC Devices
Resettable Fuse

PRODUCT: SL0805300
DOCUMENT: QR0429
ECN. NO.:
REV LETTER: A
REV DATE: 2023-6-13
PAGE NO.: 1 of 1

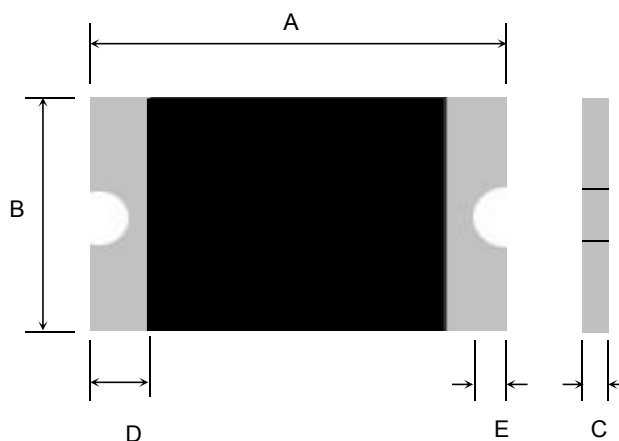
Specification Sheet

Terminal Pad Solderability:
Meets EIA Specification RS186-9E
And ANSI/J-STD-002 Category 3.

Terminal Pad Materials:
Tin-plated Nickel-Copper

Lead-Free, RoHS Compliant

Marking:
Part Identification

**TABLE I. DIMENSIONS:**

Model	Marking	A		B		C		D
		Min.	Max.	Min.	Max.	Min.	Max.	Min.
SL0805300		1.9	2.5	1.2	1.8	0.5	1.0	0.2

Unit:mm**TABLE II. PERFORMANCE RATINGS:**

Model	Marking	V_{max} (Vdc)	I_{max} (A)	I_{hold} @25°C (A)	I_{trip} @25°C (A)	P_d Typ. (W)	Maximum Time To Trip		Resistance	
							Current (A)	Time (Sec)	$R_{i_{min}}$ (Ω)	$R_{1_{max}}$ (Ω)
SL0805300		6	50	3.00	6.00	1.0	12.0	5.0	0.0030	0.0300

Order Information**Packaging**

SL0805		300	Tape & Reel Quantity	
Product name		Hold	4,000 pcs/reel	
Size 2012 mm / 0805 mils		Current		
SL: surface mount device		3.00A		

Recognition: UL Pending.

E201504/E319079 

2015/863/EU



EN14582

