

Specification Sheet

Terminal Pad Solderability:
Meets EIA Specification RS186-9E
And ANSI/J-STD-002 Category 3.

Terminal Pad Materials:
Tin-plated Nickel-Copper

Lead-Free, RoHS Compliant

Marking:
Part Identification

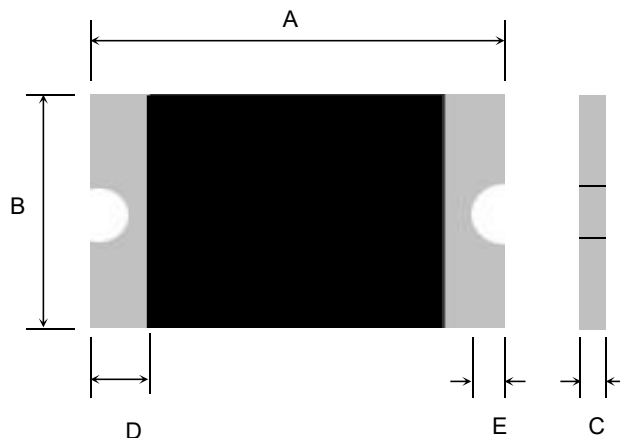


TABLE I. DIMENSIONS:

Model	Marking	A		B		C		D
		Min.	Max.	Min.	Max.	Min.	Max.	Min.
SL0805110		1.9	2.5	1.2	1.8	0.4	0.8	0.2

Unit:mm

TABLE II. PERFORMANCE RATINGS:

Model	Marking	V_{max} (Vdc)	I_{max} (A)	I_{hold} @25°C (A)	I_{trip} @25°C (A)	P_d Typ. (W)	Maximum Time To Trip		Resistance	
							Current (A)	Time (Sec)	$R_{i_{min}}$ (Ω)	$R_{1_{max}}$ (Ω)
SL0805110		6	50	1.10	2.20	1.0	8.0	0.5	0.0080	0.1200

Order Information

Packaging

SL0805	110	Tape & Reel Quantity
Product name	Hold	4,000 pcs/reel
Size 2012 mm / 0805 mils	Current	
SL: surface mount device	1.10A	

Recognition:

E201504/E319079

2015/863/EU



EN14582

