

Specification Sheet

Terminal Pad Solderability:
 Meets EIA Specification RS186-9E
 And ANSI/J-STD-002 Category 3.

Terminal Pad Materials:
 Tin-plated Nickel-Copper

Lead-Free, RoHS Compliant

Marking:

Part Identification
 T = 003

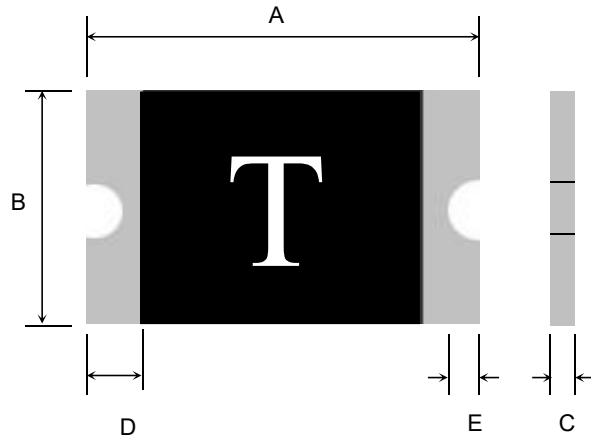


TABLE I. DIMENSIONS:

Model	Marking	A		B		C		D	E
		Min.	Max.	Min.	Max.	Min.	Max.	Min.	Min.
SMD0805-003	T	1.90	2.20	1.20	1.50	0.60	1.30	0.20	0.10

Unit:mm

TABLE II. PERFORMANCE RATINGS:

Model	Marking	V_{max} (Vdc)	I_{max} (A)	I_{hold} @25°C (A)	I_{trip} @25°C (A)	P_d Typ. (W)	Maximum Time To Trip		Resistance	
							Current (A)	Time (Sec)	$R_{i_{min}}$ (Ω)	$R_{1_{max}}$ (Ω)
SMD0805-003	T	30	40	0.03	0.10	0.5	0.2	1.00	6.000	50.000

Order Information

Packaging

SMD0805	003-60V	Max	Tape & Reel Quantity
Product name	Hold	voltage	5,000 pcs/reel
Size 2012 mm / 0805 mils	Current		
SMD: surface mount device	0.03A		

Agency Approvals :



CQC25001473187

GB 4943.1-2022; IEC 60730-1 : 2013 15、17、J.15、J.17; GB/T 7153-2002

Regulation/Standard:

2015/863/EU



EN14582

