

## Specification Sheet


Terminal Pad Solderability:  
 Meets EIA Specification RS186-9E  
 And ANSI/J-STD-002 Category 3.

Terminal Pad Materials:  
 Tin-plated Nickel-Copper

Lead-Free, RoHS Compliant

Marking:

Part Identification

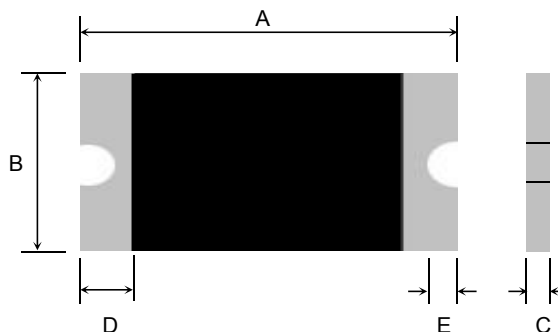

**TABLE I. DIMENSIONS:**

Model	Marking	A		B		C		D	D
		Min.	Max.	Min.	Max.	Min.	Max.	Min.	Min.
SL1210650-8V		3.00	3.50	2.35	2.90	0.60	1.20	0.30	0.10

Unit:mm

**TABLE II. PERFORMANCE RATINGS:**

Model	Marking	$V_{max}$ (V)	$I_{max}$ (A)	$I_{hold}$ @25°C (A)	$I_{trip}$ @25°C (A)	$P_d$ Typ. (W)	Maximum Time To Trip		Resistance	
							Current (A)	Time (Sec)	$R_{i_{min}}$ (Ω)	$R_{1_{max}}$ (Ω)
SL1210650-8V		8	50	6.50	13.00	1.5	20.0	5.0	0.0005	0.0080

### Order Information

### Packaging

SL1210	650-8V	Tape & Reel Quantity
Product name	Hold Max	3000 pcs/reel
Size 3225 mm / 1210 mils	Current voltage	
SL: surface mount device	6.50A	

Recognition:

E201504/E319079



2015/863/EU



EN14582

